



ES1026-2F

1U Rack Mounting

26-port 100M Fiber/Copper Port Layer 2 Unmanaged Ethernet Switch

- Support 24 100M copper ports and 2 100M fiber ports
- Input power supply 100~240VAC
- Support 0~70°C wide operating temperature range




Introduction

ES1026-2F is 26-port 100M fiber/copper port layer 2 unmanaged Ethernet switches. The device provides 24 100M copper ports and 2 100M fiber ports. It adopts rack mounting to meet the requirements of different application scenes.

The products conform to FCC, CE standard. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, rail transit, smart city, safety city, new energy, intelligent manufacturing and other fields.

Dimension

Unit:mm

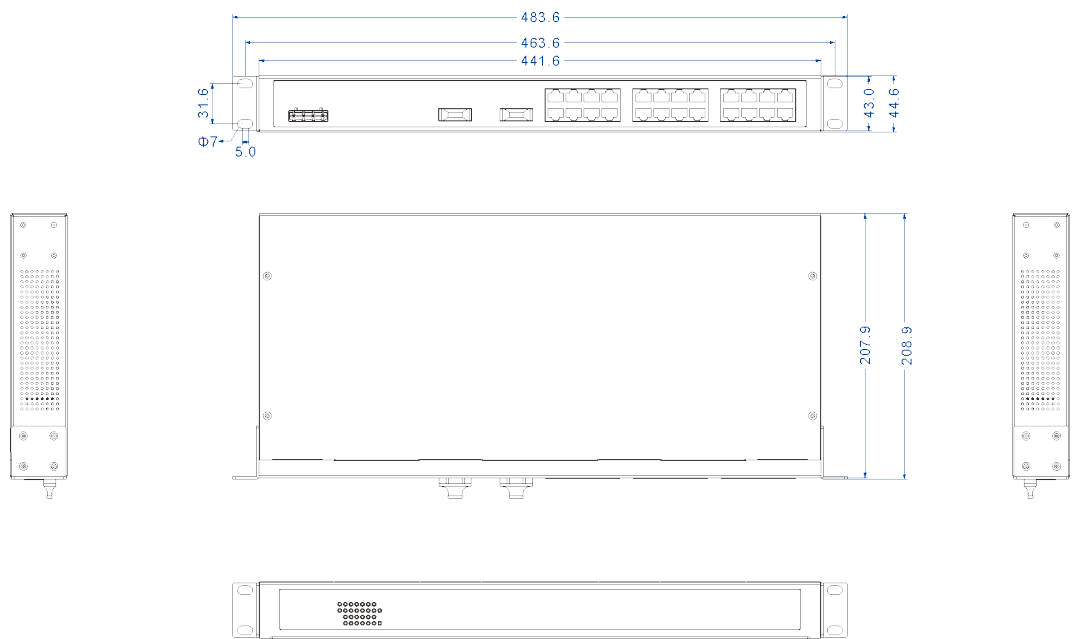

Specification

Standard & Protocol	IEEE 802.3 for 10Base-TX IEEE 802.3u for 100Base-TX and 100Base-FX
---------------------	---

Interface

Copper port: 10/100Base-T(X), RJ45, Automatic Flow Control, Full/half Duplex Mode, MDI/MDI-X Autotuning

Fiber port: 100Base-FX, SC/ST/FC interface

LED Indicator	Running Indicator, Port Indicator, Power Supply Indicator
Switch Property	Transmission mode: store and forward MAC address: 8K Packet buffer size: 2.5M Backplane bandwidth: 12.8G Switch time delay: < 15μs
Power Requirement	100-240VAC/DC, 4-pin 7.62mm pitch terminal blocks
Power Consumption	No-load: 4.2W@220VAC Full-load: 6.7W@220VAC
Environmental Limit	Operating temperature: 0~70°C Storage temperature: -40~75°C Relative humidity: 5% ~ 95% (no condensation)
Physical Characteristic	Housing: IP30 protection, metal Installation: 19 inches rack mounting Dimension (W x H x D): 441.6mm×44.6mm×207.9mm
Industrial Standard	IEC61000-4-2 (ESD) , Level 4 <ul style="list-style-type: none"> ● Air discharge: ±8kV ● Contact discharge: ±8kV IEC61000-4-4 (EFT), Level 4 <ul style="list-style-type: none"> ● Power supply: ±4kV ● Ethernet interface: ±2kV IEC61000-4-5 (Surge), Level 4 <ul style="list-style-type: none"> ● Power supply: common mode ±4kV, differential mode ±2kV ● Ethernet interface: ±4kV Shock: IEC 60068-2-27 Free fall: IEC 60068-2-32 Vibration: IEC 60068-2-6
Certification	CE, FCC, RoHS
Warranty	3 years

Ordering Information

Available Models	100M Copper Port	100M Fiber Port	Power Supply Range
ES1026-2F	24	2	100~240VAC/DC



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ [Please scan our QR code for more details](#)

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.