



IMC102GT Series

DIN-Rail Mounting

3-port Full Gigabit Unmanaged Industrial Media Converter

- Support 1 Gigabit fiber port or SFP slot optional, 2 Gigabit copper ports
- Support input voltage 12~48VDC, nonpolarity, reverse polarity protection
- Support -40~75°C wide operating temperature range




Introduction

IMC102GT series are 3-port full Gigabit unmanaged industrial media converter. This series include two types of products and provide Gigabit copper port, Gigabit fiber port and Gigabit SFP slot. It adopts DIN-Rail mounting to meet the requirements of different application scenes.

Design of DIP switch can achieve flow control, copper port compulsive 100M and jumbo frame. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, rail transit, smart city, safety city, new energy, intelligent manufacturing and other industrial fields.

Dimension

Unit:mm

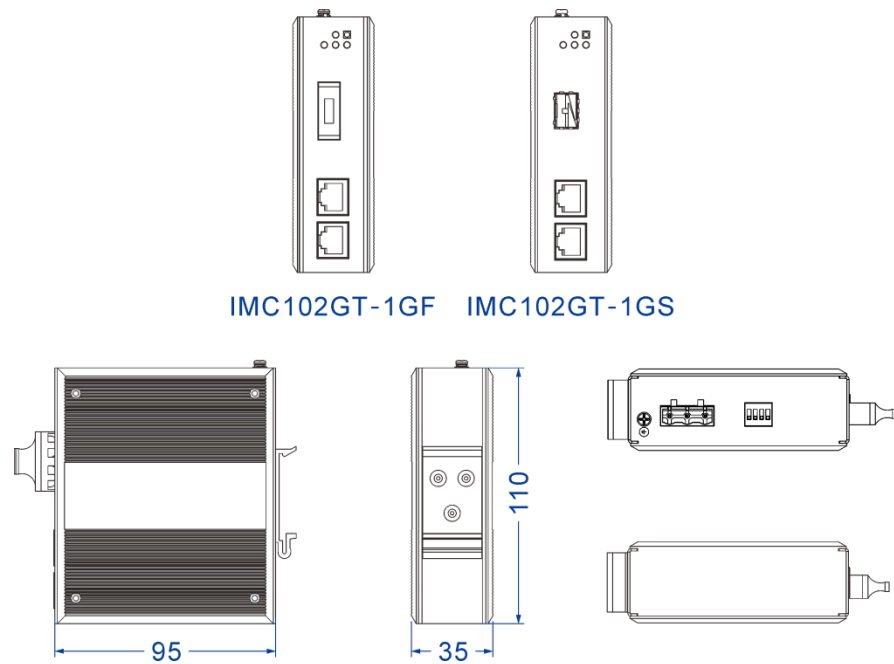

Specification

Standard & Protocol	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3z for 1000Base-X
---------------------	---

	IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow Control									
Interface	Copper port: 10/100/1000Base-T(X), RJ45, Automatic Flow Control, Full/Half Duplex Mode, MDI/MDI-X Autotuning Fiber port: 1000Base-FX, SC/ST/FC optional SFP slot: 1000Base-SFP									
LED Indicator	Running indicator, Port Indicator, Power Supply Indicator									
Switch Property	Transmission mode: store and forward MAC address: 1K Packet buffer size: 1Mbit Backplane bandwidth: 12G Switch time delay: < 10 μ s									
Power Requirement	12~48VDC, 3-pin 7.62mm pitch terminal blocks Support nonpolarity, reverse polarity protection									
Power Consumption	<table border="1"> <thead> <tr> <th>Model</th> <th>No-load (@24VDC)</th> <th>Full-load (@24VDC)</th> </tr> </thead> <tbody> <tr> <td>IMC102GT-1GF</td> <td>1.34W</td> <td>2.86W</td> </tr> <tr> <td>IMC102GT-1GS</td> <td>1.17W</td> <td>3.19W</td> </tr> </tbody> </table>	Model	No-load (@24VDC)	Full-load (@24VDC)	IMC102GT-1GF	1.34W	2.86W	IMC102GT-1GS	1.17W	3.19W
Model	No-load (@24VDC)	Full-load (@24VDC)								
IMC102GT-1GF	1.34W	2.86W								
IMC102GT-1GS	1.17W	3.19W								
Environmental Limit	Operating temperature: -40~75 $^{\circ}$ C Storage temperature: -40~85 $^{\circ}$ C Relative humidity: 5% ~ 95% (no condensation)									
Physical Characteristic	Housing: IP40 protection, metal Installation: DIN-Rail mounting Dimension (W x H x D): 35mm \times 110mm \times 95mm Weight: \leq 356g									
Industrial Standard	<p>IEC 61000-4-2 (ESD), Level 4</p> <ul style="list-style-type: none"> Air discharge: \pm16kV Contact discharge: \pm8kV <p>IEC 61000-4-4 (EFT), Level 2 (IMC102GT-1GF)</p> <ul style="list-style-type: none"> Power supply: \pm1kV Ethernet interface: \pm0.5kV <p>IEC 61000-4-4 (EFT), Level 1 (IMC102GT-1GS)</p> <ul style="list-style-type: none"> Power supply: \pm0.5kV Ethernet interface: \pm0.25kV <p>Shock: IEC 60068-2-27 Free fall: IEC 60068-2-32 Vibration: IEC 60068-2-6</p>									

Your Reliable Industrial Communication Expert

Certification	CE, FCC, RoHS
Warranty	5 years



Ordering Information

Available Models	Gigabit Fiber Port	Gigabit SFP Slot	Gigabit Copper Port	Power Supply Range
IMC102GT-1GF	1	–	2	12~48VDC
IMC102GT-1GS	–	1	2	



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ [Please scan our QR code for more details](#)

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.